INSTRUCTIONS:
Nextfit Shoulder Pad Replacement Kit

IMPORTANT: *Please also refer to the instructions that came with your product.*

WARNING: *Avoid serious injury or death to your child.* ***Never use your NextFit car seat without shoulder pads in place.*** *You must read and understand the Shoulder Pad Replacement Kit instructions and the instructions in the User Guide. If you do not understand these instructions, DO NOT attempt to replace the Shoulder Pads, STOP and call Chicco at 1-877-424-4226.*

Kit Includes:

1 set of Shoulder Pads (Right and Left)



Flat Head screwdriver (not included)

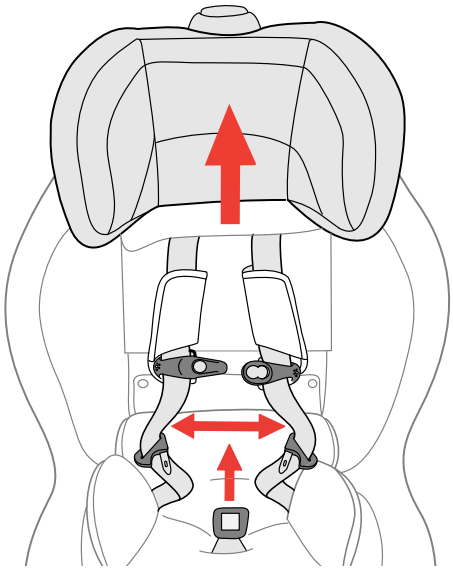

1 **Refer to User Guide** to raise the Headrest and unbuckle and loosen Harness as shown.

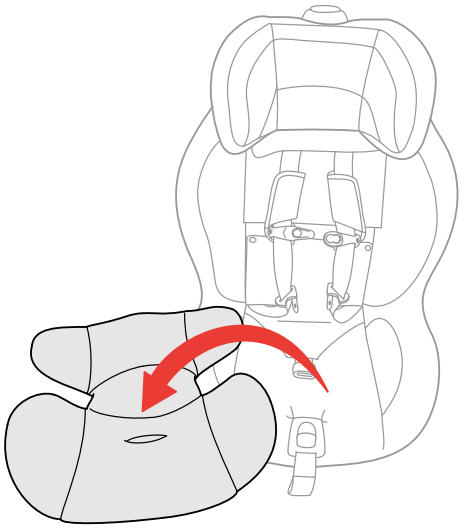

2 **Remove Newborn Insert** (if being used) as shown.

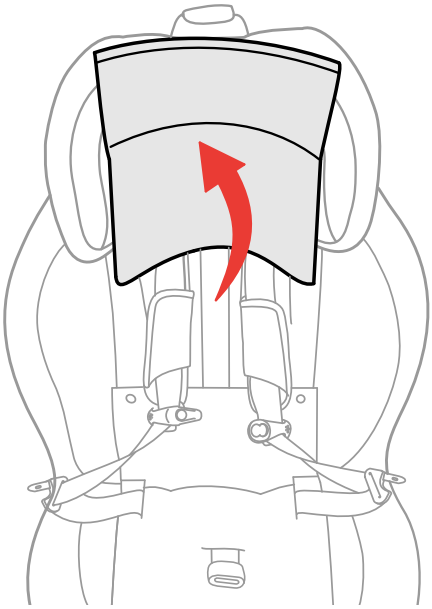

3 **Lift the Seat Back Panel** as shown.

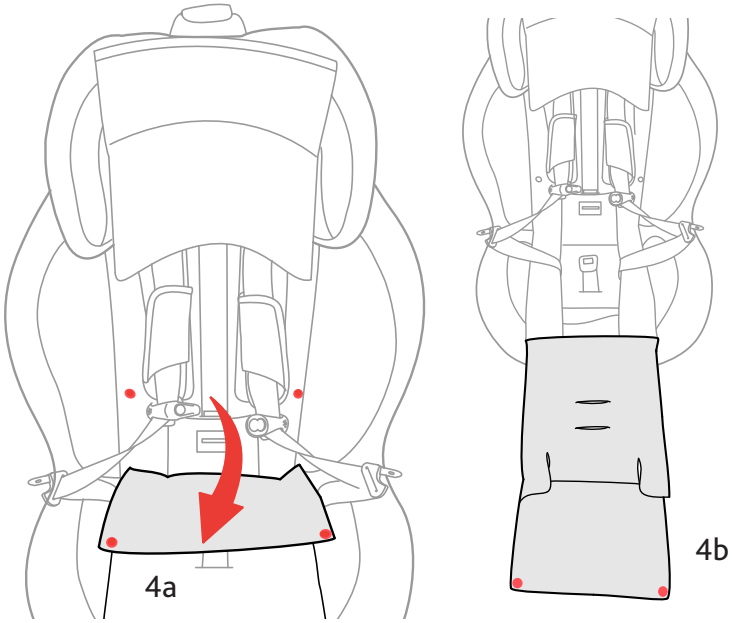

4 **Unsnap Seat Bottom Panel 4a** and pull forward **4b**.

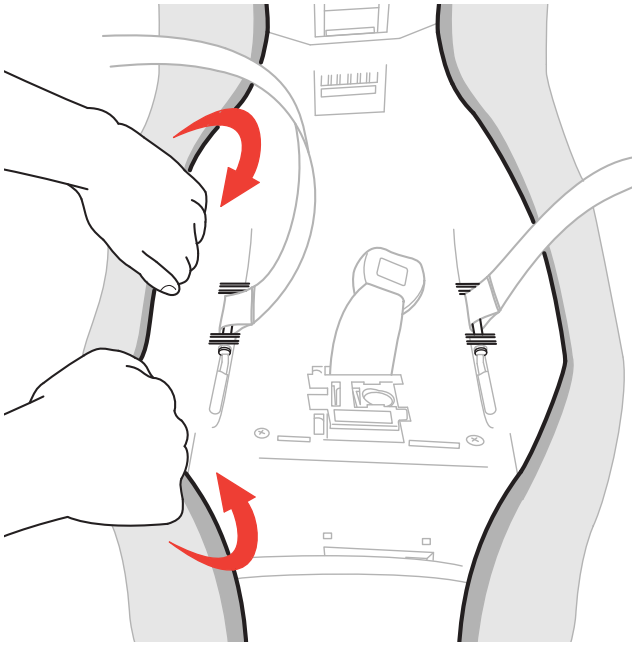

5 **Fold softgoods under <u>BOTH</u> sides** to access the metal Harness Pins.

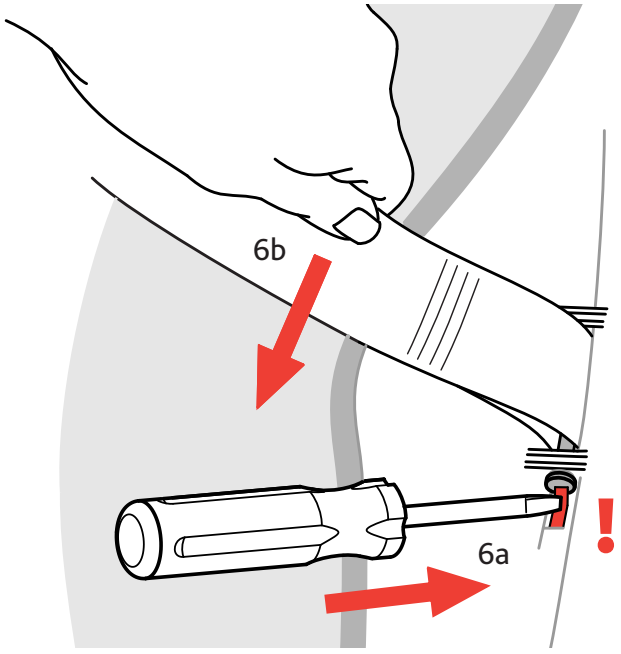

6 **! IMPORTANT - Only press hard enough on plastic lock to release the metal Harness Pin and move it forward without permanently deforming the plastic lock.**

Press down on the plastic Harness Pin Lock with a flat head screwdriver to release the metal Harness Pin **6a**. At the same time move the metal pin slightly past the plastic lock by lifting and tugging on the webbing in a forward direction **6b**.

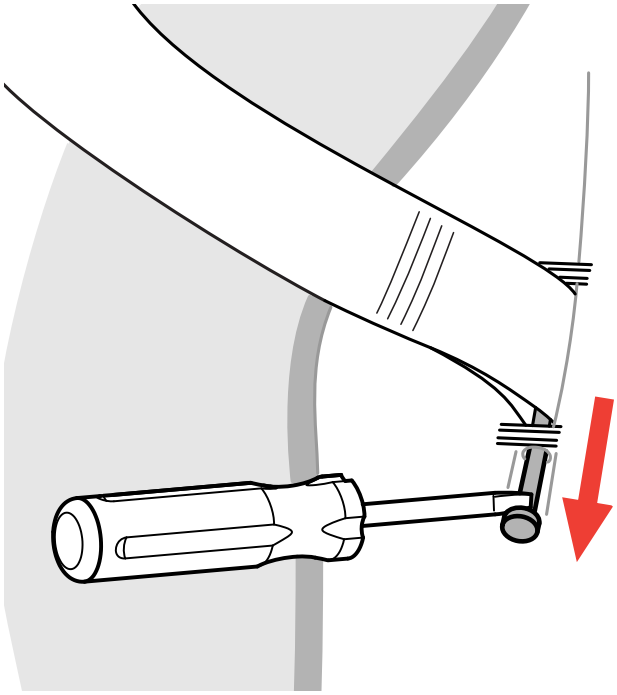

7 **Slide the metal Harness Pin forward** using a flat head screwdriver as shown.

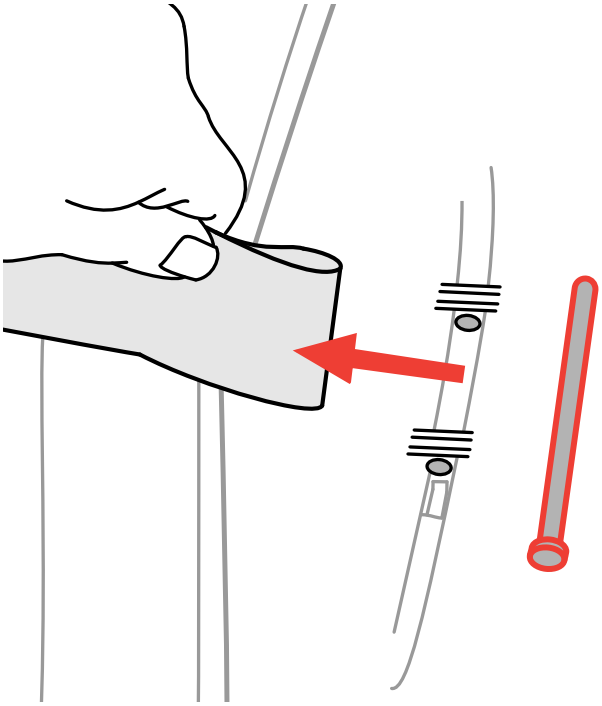

8 **Remove the metal Harness Pin completely** and release the Harness Strap, as shown. **Repeat steps 6 thru 8 to remove the metal Harness Pin on the OTHER side.**

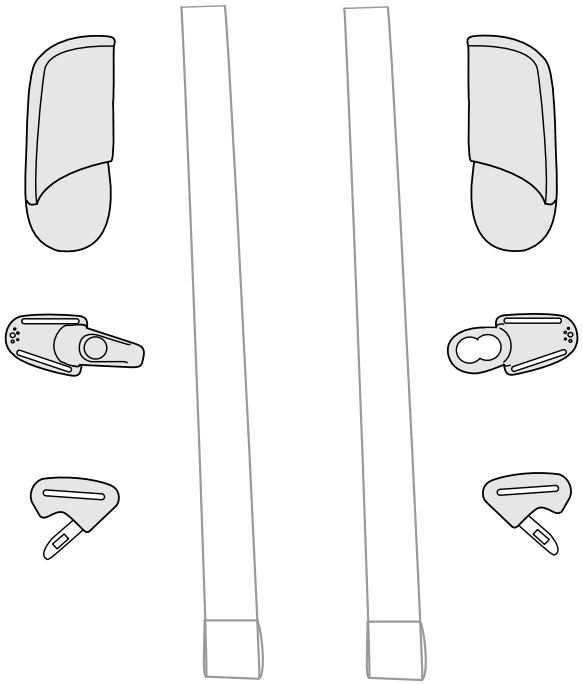

9 **! IMPORTANT - Do not mix up LEFT and RIGHT parts.**

Remove Parts from both of the Harness Straps (Harness Buckle Tongue, Chest Clip and Shoulder Pads).

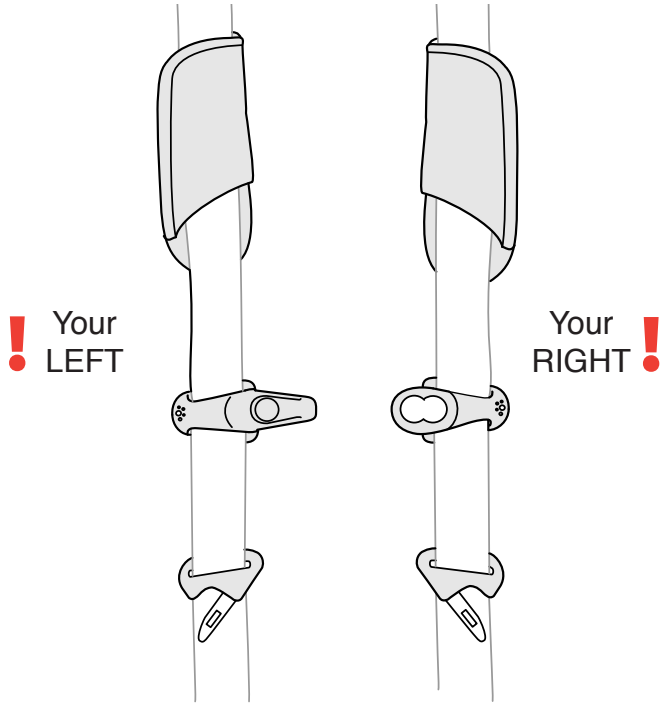

10 **Replace the Right and Left Shoulder Pad** on the Harness Straps as shown. Replace Chest Clip and Buckle Tongues as shown.

NEVER use the Child Restraint without Shoulder Pads.

! IMPORTANT - Check to make sure LEFT and RIGHT parts are oriented as shown before proceeding to the next step.

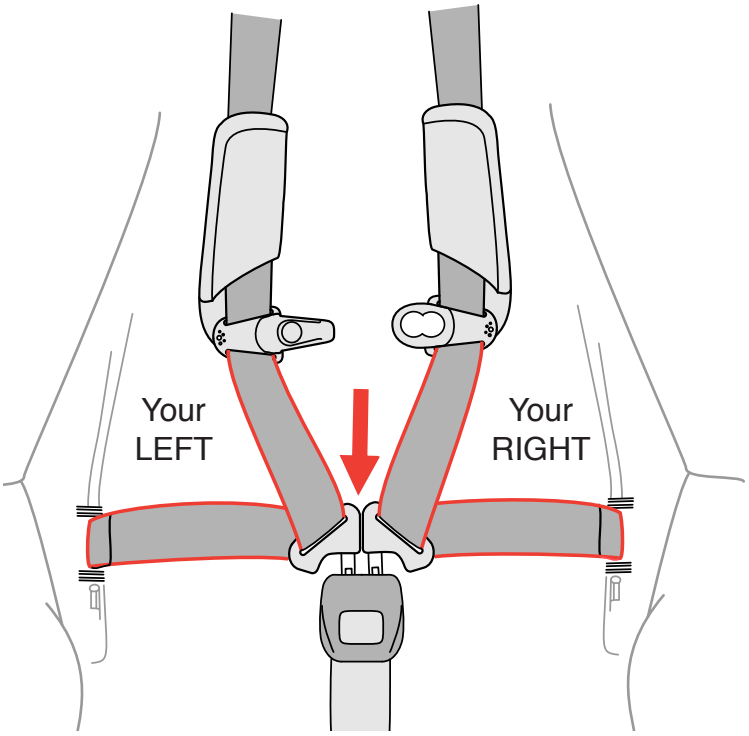

11 **Buckle BOTH Harness Straps** and fold as shown. **Check to make sure Harness Straps are flat and not twisted!**

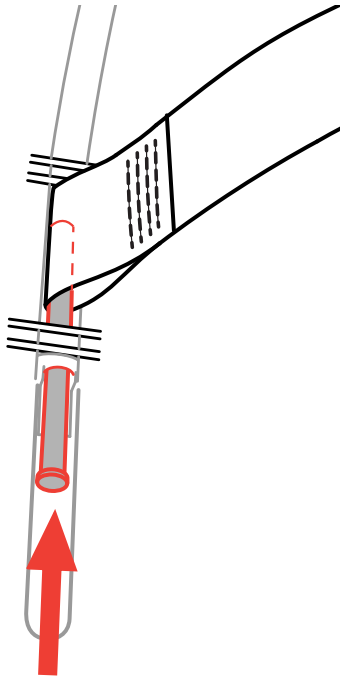

12 **Place the looped end of the Harness Strap between the Harness Pin Guide Ribs** and reinsert the metal Harness Pin as shown. **Repeat for the OTHER side.**

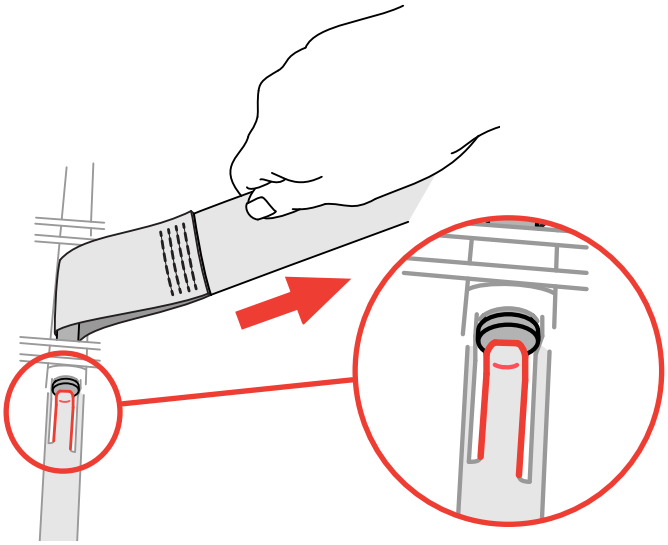

13 **Check to make sure BOTH metal Harness Pins are secured!** The metal pins must be inserted fully and the plastic Locks must be snapped upward to hold the metal Harness Pins in place. Pull on straps to make sure they have been properly secured.

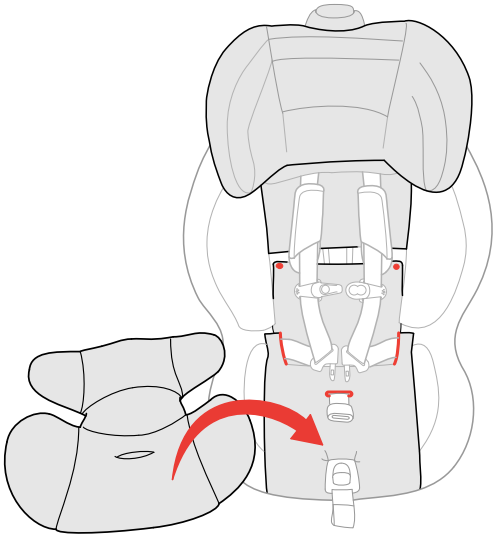

14 **Unbuckle Harness and Repeat Steps 1 thru 5 in REVERSE order: 5)** Unfold the softgoods on each side, **4)** Re-fasten Seat Bottom, **3)** Re-fasten Seat Back Panel, **2)** Add Newborn Insert (if being used), **1)** Lower Headrest if necessary. **Refer to User Guide if necessary.**

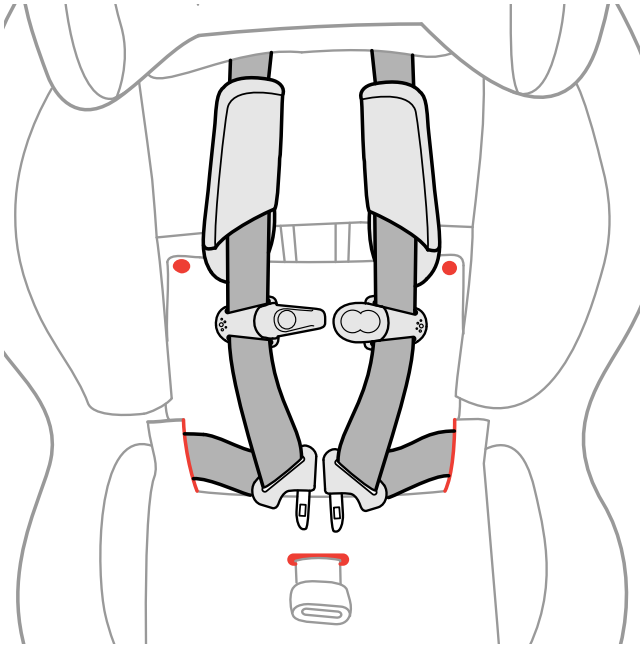

15 **IMPORTANT Final Check!** Make sure Shoulder Pads, Chest Clip, and Buckle Tongues are oriented as shown. Check to make sure Harness Straps are flat and not twisted when buckled! Check to make sure Buckle is inserted correctly through the cutout in Seat Bottom Panel. **Refer to User Guide if necessary.**

⚠***WARNING:*** *Avoid serious injury or death to your child. You must make sure that all harness components and shoulder pads have been replaced correctly, so the seat can provide maximum crash protection. Pull on adjuster strap and the shoulder straps of the harness and operate the harness after this replacement is complete. Make sure all straps are properly routed and secured. Make sure Shoulder Pads, Chest Clip, and Buckle Tongues are oriented and installed correctly. If you have a problem, retry these instructions provided AND review your User Guide. If you still have problems, STOP, Do Not use the Car Seat, and call Chicco at 1-877-424-4226.*